


Disc Springs

DIN 2093
(JIS B 2706 參考)

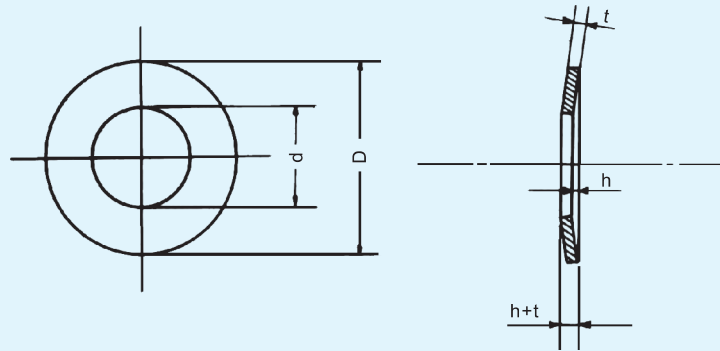

Unit:mm

Size-No	d		D		H (Heavy Duty)				L (Light Duty)			
					t		h		h+t		t	
	Basic	Tol.	Basic	Tol.	Basic	Tol.	Approx.	Approx.	Basic	Tol.	Approx.	Approx.
DB-4	4.2	+0.3 -0.1	8.0	±0.3	0.40	±0.04	0.20	0.60	0.30	±0.03	0.25	0.55
5	5.2		10.0		0.50		0.25	0.75	0.40		0.30	0.70
6	6.2		12.5		0.60	±0.05	0.30	0.90	0.50	±0.04	0.35	0.85
7	7.2		14.0		0.80		0.30	1.10	0.50		0.40	0.90
8	8.2		16.0		0.90	±0.06	0.35	1.25	0.60	±0.05	0.45	1.05
9	9.2	+0.4 -0.1	18.0	±0.4	1.00		0.40	1.40	0.70		0.50	1.20
10	10.2		20.0		1.00	±0.07	0.45	1.45	0.80	±0.06	0.55	1.35
11	11.2		22.5		1.20		0.50	1.70	0.80		0.65	1.45
12	12.2		25.0		1.50	±0.07	0.55	2.05	0.90		0.70	1.60
14	14.2		28.0		1.50		0.65	2.15	1.00	±0.06	0.80	1.80
16	16.3	+0.5 -0.2	31.5	±0.5	1.75	±0.08	0.70	2.45	1.20		0.90	2.10
18	18.3		35.5		2.00		0.80	2.80	1.20	±0.07	1.00	2.20
20	20.4		40.0		2.00	±0.10	0.90	2.90	1.50		1.15	2.65
22	22.4		45.0		2.50		1.00	3.50	1.75	±0.08	1.30	3.05
25	25.4		50.0		3.00	±0.12	1.10	4.10	2.00		1.40	3.40
28	28.5	+0.6 -0.4	56.0	±0.6	3.00		1.30	4.30	2.00	±0.10	1.60	3.60
30	31.0		63.0		3.50	±0.15	1.40	4.90	2.50		1.75	4.25
35	36.0		71.0		4.00		1.60	5.60	2.50	±0.12	2.00	4.50
40	41.0		80.0		5.00	±0.15	1.70	6.70	3.00		2.30	5.30
45	46.0		91.0		5.00		2.00	7.00	3.50	±0.12	2.50	6.00
50	51.0	±0.7	100.0	±0.7	6.00		2.20	8.20	3.50		2.80	6.30

Material = Carbon spring steel
Hardness = HRC40~50
Finish = Black oxide

材質 = 碳鋼
硬度 = HRC40~50
表面處理 = 染黑



DB MB盤型華司