




FSPN-Push Nut Blot Retainers (Tooth)(Screw)

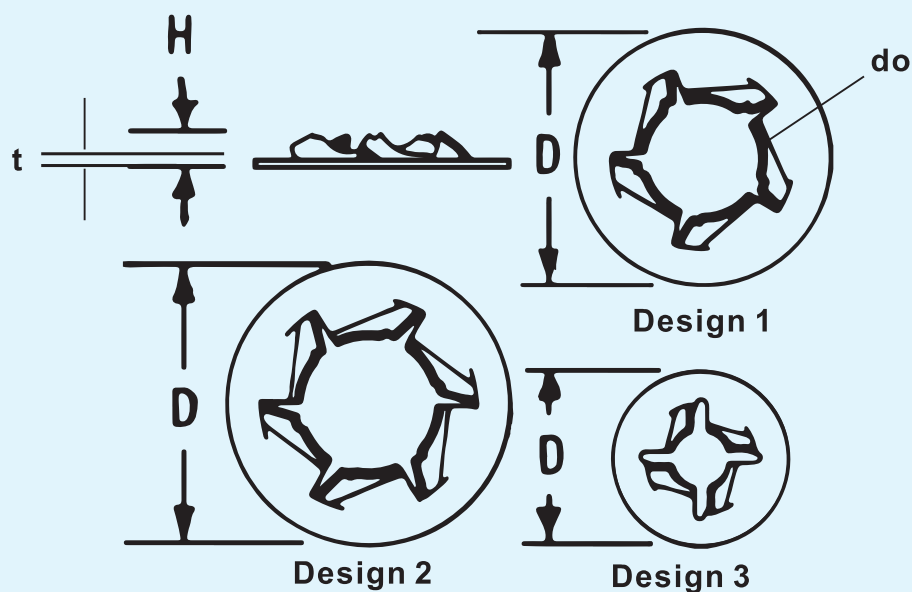

Unit:inch

Bolt Diameter	Design	Diameter D Approx.	Height H Ref.	Material Thickness	Push-On Force Lbs. (Max)	Holding Strength Lbs. (Min)	Weight Lbs./M Pieces	Part Number
6#	3	11/32	.049	.010	17	40	0.2	PT138055
8#	3	3/8	.049	.010	22	50	0.3	PT164006
8#	3	.500	.049	.010	22	50	0.5	PT164008
10#	3	7/16	.065	.012	25	65	0.4	PT190007
1/4	1	1/2	.078	.010	25	90	0.5	PT250008
5/16	1	5/8	.082	.013	30	100	0.9	PT312010
3/8	2	25/32	.093	.015	30	150	1.7	PT375125
7/16	2	27/32	.103	.015	30	250	1.9	PT438135
1/2	2	15/16	.122	.015	30	300	2.3	PT500015
9/16	2	.984	.150	.015	50	310	2.8	PT562157

Material=Carbon spring steel. (Stainless spring steel.)
Hardness=HRC 40~50
Finish=Black phosphate coating (ACP). Zn plating

材質=碳鋼、不鏽鋼
硬度=HRC 40~50.
表面處理=染黑、磷酸鹽