


Cage Nut

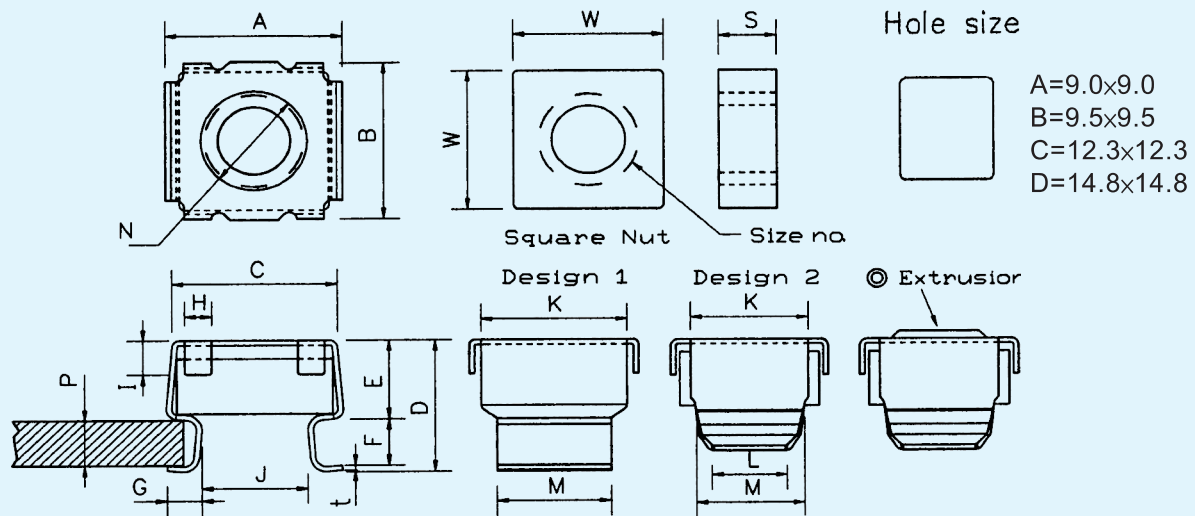

Unit:inch

Nut Size-No	Design	Cage Type	P	A ±0.5	B ±0.5	C ±0.5	D ±0.5	E ±0.2	F ±0.2	G	H	I	J	K	L	M	N	t	Square Nut ±0.25 w×w×s	Weight Approx. 1,000/kg	Hole size ±0.2
M5-0.8 8#-10#-12# Option of combination	2	S	0.7~1.7	13.0	13.3	12.2	8.4	6.1	1.8	2.5	3.1	3.2	8.3	9.6	6.1	7.5	7.0	0.4	11x11x4.5	4.60	B
	1	M	1.7~2.2	13.0	13.3	12.2	9.2	6.2	2.3	2.2	3.1	3.2	8.3	9.6	-	8.2	7.0	0.4		4.60	A.B
	1	MW	1.7~2.2	13.0	13.3	12.2	9.2	6.2	2.3	2.6	3.1	3.2	8.3	9.6	-	8.2	7.0	0.4		4.62	B
	2	ML	1.7~2.6	13.0	13.3	12.2	9.7	6.2	2.7	2.1	1.5	3.0	8.3	12.1	5.5	9.3	7.0	0.4		4.63	B
	2	MS	1.7~2.7	13.4	13.0	12.5	9.4	6.1	2.85	2.4	2.5	3.1	8.3	9.4	6.0	8.2	7.0	0.4		4.63	A.B
	1	L	2.2~3.4	13.2	13.2	12.2	10.0	6.2	3.4	2.6	3.0	3.1	8.3	9.6	-	8.2	7.0	0.4		4.65	B
	1	LW	2.2~3.4	13.0	13.2	12.2	10.1	6.1	3.4	2.3	3.0	3.1	8.3	9.6	-	8.2	7.0	0.4		4.65	A.B
	◎2	XL	3.1~4.2	13.5	13.3	12.3	10.9	6.1	4.2	2.1	2.8	2.9	8.4	9.6	5.3	8.5	7.0	0.5		4.90	B
M6-1.0 8#-10#-12# Option of combination	2	S	0.7~1.7	13.0	13.3	12.2	8.4	6.1	1.8	2.5	3.0	3.2	8.3	9.6	6.1	7.5	7.0	0.4	11x11x4.5	4.12	B
	1	M	1.7~2.2	13.0	13.3	12.2	9.2	6.2	2.3	2.2	3.0	3.2	8.3	9.6	-	8.2	7.0	0.4		4.26	A.B
	1	MW	1.7~2.2	13.0	13.3	12.2	9.2	6.2	2.3	2.6	3.0	3.2	8.3	9.6	-	8.2	7.0	0.4		4.28	B
	2	ML	1.7~2.6	13.0	13.3	12.2	9.7	6.2	2.7	2.1	1.5	3.0	8.3	12.1	5.5	9.3	7.0	0.4		4.32	B
	2	MS	1.7~2.7	13.4	13.0	12.5	9.4	6.1	2.85	2.4	2.5	3.1	8.3	9.4	6.0	8.2	7.0	0.4		4.38	A.B
	1	L	2.2~3.4	13.2	13.2	12.2	10.0	6.2	3.4	2.6	3.0	3.1	8.3	9.6	-	8.2	7.0	0.4		4.40	B
	1	LW	2.2~3.4	13.0	13.2	12.2	10.1	6.1	3.4	2.3	3.0	3.1	8.3	9.6	-	8.2	7.0	0.4		4.40	A.B
	◎2	XL	3.1~4.2	13.5	13.3	12.3	10.9	6.1	4.2	2.1	2.8	2.9	8.4	9.6	5.3	8.5	7.0	0.5		4.62	B
M8-1.25 Option of combination	2	S	0.7~2.0	16.5	15.8	15.3	10.7	8.0	2.1	3.1	3.0	3.4	10.3	12.1	8.6	10.5	10	0.5	14x14x5.5	8.32	C
	2	M	2.1~2.8	16.6	15.8	15.3	11.5	8.1	2.9	3.1	3.0	3.5	10.3	12	8.6	10.6	10	0.5		8.35	C
	1	ML	2.9~3.3	16.3	16.3	15.1	11.8	7.6	3.4	2.9	2.5	3.0	10.0	13	-	10.5	10	0.5		8.36	C
	1	L	3.3~4.6	16.5	16.0	15.5	13.2	8.0	4.8	3.1	2.5	3.4	10.3	12	-	10.6	10	0.5		8.56	C
M10-1.5 Option of combination	2	S	0.7~2.0	16.5	15.8	15.3	10.7	8.0	2.1	3.1	3.0	3.4	10.3	12.1	8.6	10.5	10	0.5	14x14x5.5	7.26	C
	2	M	2.1~2.8	16.6	15.8	15.3	11.5	8.1	2.9	3.1	3.0	3.5	10.3	12	8.6	10.6	10	0.5		7.28	C
	1	ML	2.9~3.3	16.3	16.3	15.1	11.8	7.6	3.4	2.9	2.5	3.0	10.0	13	-	10.5	10	0.5		7.29	C
	1	L	3.3~4.6	16.5	16.0	15.5	13.2	8.0	4.8	3.1	2.5	3.4	10.3	12	-	10.6	10	0.5		7.48	C
M12-1.75	2	-	3.3~4.0	22.0	20.2	21.5	14.6	9.9	4.0	4.2	5.0	4.3	13	18.3	5.0	12.9	14.3	0.6	19x19x8	18.90	D

Material	Hardness	Finish	Option of combination	
Cage C1050 S50C + Nut C1008	Cage:HRC 40~50	YZ/P,Z/P, B/O YZ+Cr3,ZP+Cr3	Cage Type: S,M,MW,ML,MS,L,LW,XL Nut Type: M4,M5,M6,3/16,1/4,8#,10#,12#	Cage Type: S,M,ML,L Nut Type: M8,M10,5/16,3/8
Cage s/s 304 + Nut s/s304 or C1008	N/A	Plain		
M5,M6 box/ 5,000PCS	M8,M10 box/ 2,500PCS			