




Retaining Rings (Internal)

(Din 472)

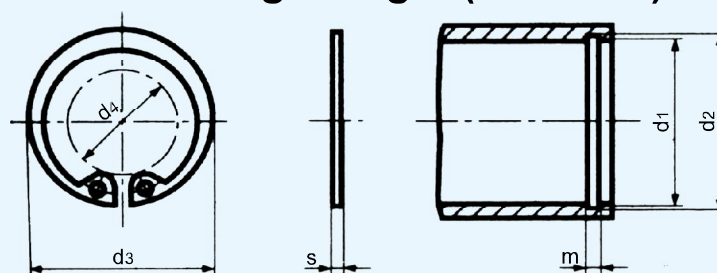

Unit:mm

Ø arbre Shaft dia. d1	d3	tol.adm. perm.tol.	d4 Ouvert fitted	s	d2	m H13
8	8.7	+0.36 -0.10	3.0	0.80	8.4	0.90
9	9.8		3.7		9.4	
10	10.8		3.3	1.00	10.4	1.10
11	11.8		4.1		11.4	
12	13.0		4.9		12.5	
13	14.1		5.4		13.6	
14	15.1		6.2		14.6	
15	16.2		7.2		15.7	
16	17.3		8.0		16.8	
17	18.3		8.8		17.8	
18	19.5		9.4		19.0	
19	20.5	+0.42 -0.13	10.4		20.0	
20	21.5		11.2		21.0	
21	22.5		12.2		22.0	
22	23.5		13.2		23.0	
(23)	24.6	+0.42 -0.21	13.6	1.20	24.1	1.30
24	25.9		14.8		25.2	
25	26.9		15.5		26.2	
26	27.9		16.1		27.2	
(27)	29.1	+0.50 -0.25	16.6		28.4	
28	30.1		17.9		29.4	
30	32.1		19.9		31.4	
32	34.4		20.6	1.50	33.7	1.60
33	35.5		21.6		34.7	
34	36.5		22.6		35.7	
35	37.8		23.6		37.0	
36	38.8		24.6		38.0	
37	39.8	+0.90 -0.39	25.4		39.0	1.85
38	40.8		26.4		40.0	
39	42.0		27.0		41.0	
40	43.5		27.8	1.75	42.5	
42	45.5		29.6		44.5	
44	47.5	+1.10 -0.46	31.2		46.5	
45	48.5		32.0	2.00	47.5	2.15
47	50.5		33.5		49.5	
48	51.5		34.5		50.5	
50	54.2		36.3		53.0	
52	56.2	+1.30 -0.54	37.9		55.0	2.65
55	59.2		40.7	2.50	58.0	
60	64.2		44.7		63.0	
62	66.2		46.7		65.0	
65	69.2		49.0		68.0	
68	72.2		51.6	3.00	71.0	3.15
70	74.5		53.6		73.0	
75	79.5		58.6		78.0	
78	82.5		60.1		81.0	
80	85.5		62.1		83.5	
85	90.5		66.9		88.5	
90	95.5		71.9		93.5	
95	100.2		76.5		98.5	
100	105.5		80.6		103.5	