


Retaining Rings (External)

(Din 471)

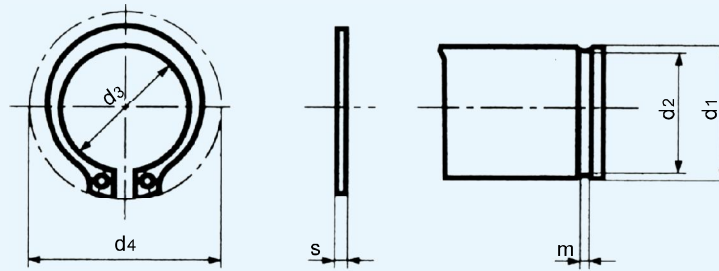

Unit:mm

Ø arbre Shaft dia. d1	d3	tol.adm. perm.tol.	d4 Ouvrt fitted	s	d2	m H13
Ø	3	+0.04 -0.15	7.0	0.40	2.8	0.50
	4		8.6	0.40	3.8	0.50
	5		10.3	0.60	4.8	0.70
	6		11.7	0.70	5.7	0.80
	7	+0.06 -0.18	13.5	0.80	6.7	0.90
	8		14.7	0.80	7.6	0.90
	9		16.0	1.00	8.6	1.10
	10		17.0	1.00	9.6	1.10
	11	+0.10 -0.36	18.0	1.00	10.5	1.10
	12		19.0	1.00	11.5	1.10
	13		20.2	1.00	12.4	1.10
	14		21.4	1.00	13.4	1.10
	15		22.6	1.00	14.3	1.10
	16		23.8	1.00	15.2	1.10
	17		25.0	1.00	16.2	1.10
	18		26.2	1.20	17.0	1.30
	19		27.2	1.20	18.0	1.30
	20	+0.13 -0.42	28.4	1.20	19.0	1.30
	21		29.6	1.20	20.0	1.30
	22		30.8	1.20	21.0	1.30
	(23)		32.6	1.20	22.0	1.30
	24	+0.21 -0.42	33.2	1.20	22.9	1.30
	25		34.2	1.20	23.9	1.30
	26		35.5	1.20	24.9	1.30
	(27)		37.2	1.20	25.6	1.30
	28		37.9	1.50	26.6	1.60
	29		39.1	1.50	27.6	1.60
	30		40.5	1.50	28.6	1.60
	32		43.0	1.50	30.3	1.60
	(33)		44.4	1.50	31.3	1.60
	34	+0.25 -0.50	45.4	1.50	32.3	1.60
	35		46.8	1.50	33.0	1.60
	36		47.8	1.75	34.0	1.85
	(37)		49.4	1.75	35.0	1.85
	38	+0.39 -0.90	50.2	1.75	36.0	1.85
	39			1.75	37.0	1.85
	40		52.6	1.75	37.5	1.85
	42		55.7	1.75	39.5	1.85
	44			1.75	41.5	1.85
	45		59.1	1.75	42.5	1.85
	48		62.5	1.75	45.5	1.85
	50		64.5	2.00	47.5	2.15
	55		40.2	2.00	52.0	2.15
	60	+0.46 -1.10	75.6	2.00	57.0	2.15
	70		87.0	2.50	67.0	2.65
	75		92.7	2.50	72.0	2.65
	80		98.1	2.50	76.5	2.65
	100		120.2	3.00	96.5	3.15