

Tooth lock washers


(Din 6797)



AW內齒華司



BW外齒華司

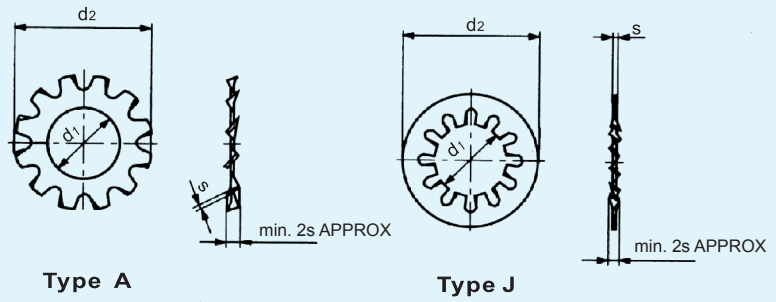


Unit:mm

	pour vis for screws	d1 min.	d2 max.	s
M	2.5	2.7	5.5	0.4
	3	3.2	6.0	0.4
	4	4.3	8.0	0.5
	5	5.3	10.0	0.6
	6	6.4	11.0	0.7
	8	8.4	15.0	0.8
	10	10.5	18.0	0.9
	12	13.0	20.5	1.0
	14	15.0	24.0	1.0
	16	17.0	26.0	1.2

HRC=35~43

Serrated lock washers

(Din 6798)

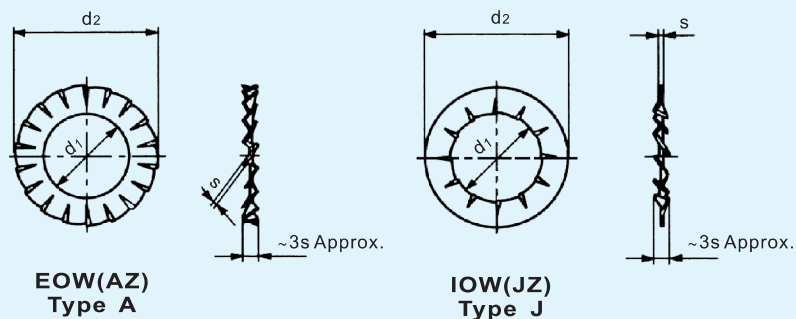

Unit:mm

	pour vis for screws	d1 min.	d2 max.	s
M	2	2.2	4.5	0.3
	2.5	2.7	5.5	0.4
	3	3.2	6.0	0.4
	(3.5)	3.7	7.0	0.5
	4	4.3	8.0	0.5
	5 ¹⁾ /5.1	5.1	9.0	0.5
	5/5.3	5.3	10.0	0.6
	6	6.4	11.0	0.7
	8 ¹⁾ /8.2	8.2	14.0	0.8
	8/8.4	8.4	15.0	0.8
	10	10.5	18.0	0.9
	12	13.0	20.5	1.0
	(14)	15.0	24.0	1.0
	16	17.0	26.0	1.2
	20	21.0	33.0	1.4