


U - Type Plate Nuts (Screw type)

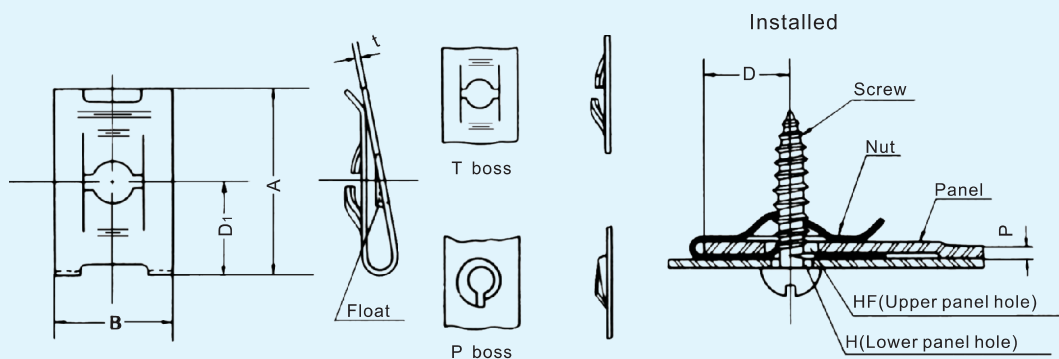

Unit:mm

Size-No.	Applicable screw See note 1	Nut dimension				Panel size					Remarks		
		A	B	D1	t	P		D	H	HF	Material.	Boss	Float
						Min.	Max.	Min.					
USN-3001	M3×0.5	18.0	11.2	9.0	0.30	0.6	1.0	7.5	4.0	5.5		T	
3006	M3×0.5	11.5	8.0	6.0	0.30	0.6	1.2	4.5	4.0	4.0	SUS	P	Without
3012	M3-24	11.5	8.0	6.0	0.45	0.6	1.2	4.5	4.0	4.0	SUS	P	Without
4001	M4×0.7	20.0	12.7	10.0	0.40	0.7	1.2	8.0	5.0	7.0		T	
4003	M4×0.7	16.5	9.0	10.0	0.40	0.7	1.2	8.5	5.0	6.0		P	Without
4004	M4-16	20.0	12.7	10.0	0.80	0.8	1.5	8.0	5.0	7.0		T	
4005	M4-16	20.0	12.7	10.0	0.80	1.0	1.6	8.0	5.0	6.0	SUS	P	Without
4006	M4-16	16.3	11.0	8.3	0.60	1.0	1.6	6.5	5.0	7.0		T	
4007	M4-16	20.0	12.7	13.0	0.45	2.0	2.7	10.0	5.0	6.0		T	Without
4024	M4-16	17.0	11.0	9.1	0.60	0.7	1.6	7.0	5.0	7.0		T	
4026	M4-16	16.0	11.0	8.0	0.50	2.0	2.5	6.0	5.0	7.0	SUS	P	
4031	M4-18	19.0	9.0	13.0	0.45	2.0	3.0	10.5	5.0	6.0		P	Without
4037	M4×0.7	18.0	9.0	12.0	0.40	1.0	1.2	10.0	5.0	6.0	SUS	P	Without
4048	M4-16	24.0	11.0	17.0	0.60	0.7	1.6	14.5	5.0	7.0		T	
5001	M5×0.8	20.0	12.7	10.0	0.45	0.7	1.2	8.0	6.5	8.0		T	
5003	M5-12	20.0	13.0	11.5	0.70	1.0	2.3	9.5	6.5	7.0		T	Without
5004	M5-16	19.6	13.0	11.6	0.60	0.7	1.5	9.5	6.5	8.0		P	
5008	M5-16	32.2	12.7	22.2	0.70	1.0	2.6	19.0	6.5	8.0	SUS	P	
5011	M5-16	16.0	8.0	9.0	0.60	0.7	1.6	7.0	6.5	7.0		P	
5016	M5-16	16.2	12.7	8.7	0.70	0.8	1.6	7.0	6.5	6.5		T	Without
5017	M5×0.8	21.0	12.7	11.5	0.40	1.3	2.0	9.0	6.5	6.5		T	Without
5018	M5-16	20.0	13.0	10.0	0.70	1.2	1.6	8.0	6.5	6.5		P	Without
6001	M6×1	20.0	12.7	10.0	0.50	0.7	1.2	8.0	7.5	9.5		T	
6002	M6-10	21.8	12.7	11.8	0.80	0.7	1.2	10.0	7.5	7.5		P	Without

Material = Carbon spring steel
Hardness = HRC40~50
Finish = Black oxide / phosphate / Yellow Zinc

材質 = 碳鋼
硬度 = HRC40~50
表面處理 = 染黑/磷酸鹽/五彩



USN 夾片