




E-Ring 美規

(5133)

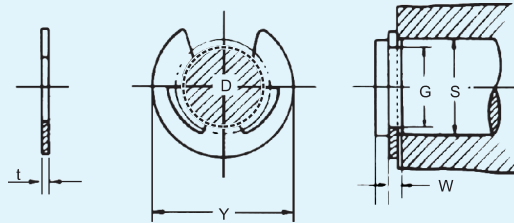

Unit:INCH

Part No.	Shaft Diameter S (approx.)			Groove				Ring					
				Diameter		Width		Free Inside Dia.		Diameter		Thickness	
	Frac.	Dec. Equiv.	mm	G	Tol.	W	Tol.	D	Tol.	Y	C2	t	Tol.
	Inches	Inches		Inches	Inches	Inches	Inches	Inches	Inches	Inches	Inches	Inches	Inches
5133-X4	-	.040	1.0	.026	+ .002	.012		.0250		.079	.090	.010	
X6	1/16	.062	1.6	.052	- .000	.012		.0510	+ .001	.140	.150	.010	± .001
Y6	1/16	.062	1.6	.052	± .002	.023		.0510	- .003	.187	.200	.020	± .002
6	1/16	.062	1.6	.052		.012		.0510		.156	.165	.010	± .001
X9	3/32	.094	2.4	.074		.020	+ .002	.0690	+ .002 - .003	.230	.245	.015	
9	3/32	.094	2.4	.074		.020	- .000	.0730		.187	.200	.015	
X11	7/64	.110	2.8	.079		.020		.0760		.375	.390	.015	
12	1/8	.125	3.2	.095		.020		.0940		.230	.240	.015	
X14	9/64	.140	3.6	.102		.020		.1000		.203	.215	.015	
Y14	9/64	.140	3.6	.110	+ .002 - .000	.020		.1080		.250	.265	.025	
14	9/64	.140	3.6	.105		.029		.1020	+ .001	.270	.285	.015	
15	5/32	.156	4.0	.116		.029		.1140	- .003	.282	.295	.025	
X17	11/64	.172	4.4	.127		.029		.1250		.312	.325	.025	
X18	3/16	.188	4.8	.125		.029		.1220		.375	.390	.025	
18	3/16	.188	4.8	.147		.029		.1450		.335	.350	.025	
X21	7/32	.219	5.6	.188		.029		.1850		.437	.450	.025	± .002
25	1/4	.250	6.3	.210		.029		.2070		.527	.540	.025	
X31	5/16	.312	7.9	.250		.029	+ .003 - .000	.2430		.500	.520	.025	
37	3/8	.375	9.5	.303		.039		.3000	+ .002 - .004	.660	.680	.035	
43	7/16	.438	11.1	.343		.039		.3370		.687	.710	.035	
X43	7/16	.438	11.1	.380		.039		.3750		.600	.620	.035	
50	1/2	.500	12.7	.396		.046		.3920		.800	.820	.042	
62	5/8	.625	15.9	.485	+ .003 - .000	.046		.4800		.940	.960	.042	
X74	3/4	.750	19.0	.625		.056		.6160	+ .003 - .005	1.000	1.020	.050	
75	3/4	.750	19.0	.580		.056		.5740		1.120	1.140	.050	
87	7/8	.875	22.2	.675		.056		.6680		1.300	1.320	.050	
X98	63/64	.984	25.0	.835		.056		.8220		1.500	1.530	.050	
X98	1	1.000	25.4	.835		.056		.8220		1.500	1.530	.050	
X118	1-3/16	1.188	30.2	1.079		.068	+ .004 - .000	1.0660	+ .006 - .010	1.626	1.670	.062	± .003
X137	1-3/8	1.375	34.9	1.230		.068		1.2130		1.875	1.920	.062	